

**Honeywell**




# **BLENZE PLUS**

Flat-ter Yourself



GHAR MEIN **HONEYWELL**, TOH LIFE VERY WELL!

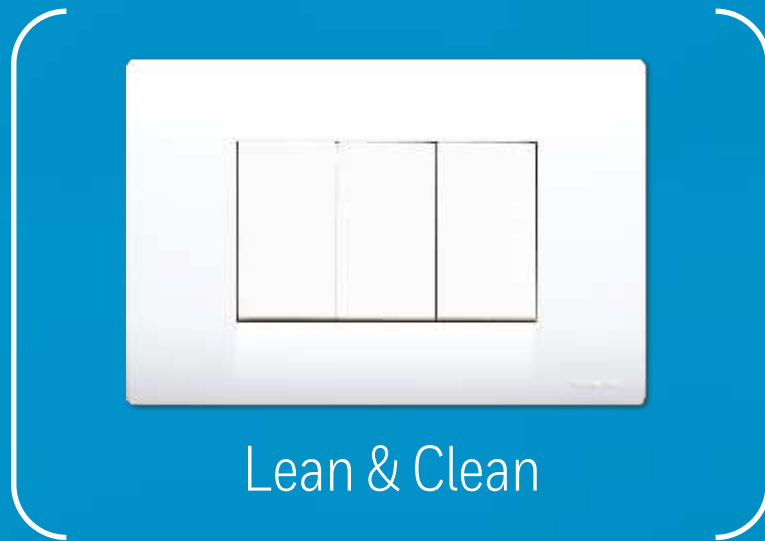

## Blenze plus



**India's First Anti-Bacterial Flat Switch**

Anti-Bacterial technology: **99% Bacteria control**

**Switches, Sockets & Front Plates**

## Contents

Switches	<b>4</b>	Communication Range	<b>7</b>
Sockets	<b>5</b>	Technology Modules	<b>8</b>
Front Plates	<b>6</b>	Hospitality Range	<b>9</b>
Dimmers and Regulators	<b>6</b>	Metal Box	<b>10</b>

# Blenze plus

## India's First Anti-Bacterial Flat Switch


Blenze plus introduces a range of wiring accessories (switches, sockets & front plates), which offer protection against microbial contamination/ infection, using new generation anti-bacterial technology. Hygiene and Infection control is now becoming increasingly important in environments like hospitals, and homes. Anti-microbial coating impregnated with silver ions inhibits microbial growth to improve hygiene. The active ingredients, silver ions, used in Blenze plus products are incorporated during the manufacturing process and are therefore active for the entire life of the product.

### + Anti-Bacterial Technology

This active ingredient inhibits the growth of broad spectrum bacteria and fungi such as E-coli, Staphylococcus aureus, Listeria and Salmonella.

Bacti-safe is a new generation antibacterial technology with advanced features:

- 99% reduction in bacteria (Ecoli & Staphylococcus aureus) on the surface Healthy environment
- Non toxic and safe for humans
- Permanent coating equal to product life Durable and Value for money
- Material: Silver Ion (anti-bac coating) with Poly carbonate Aesthetically pleasing and Fire retardant

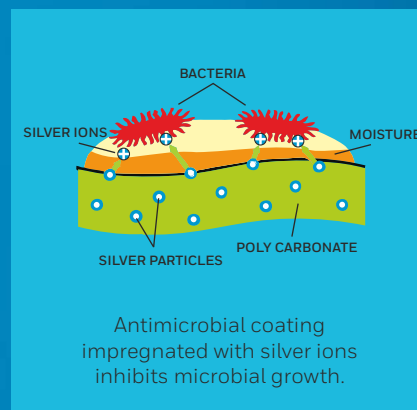

### + Flat Modular Switches

+ Front Loading & Removal, Universal Adaptability

+ Sturdy Muscular Construction + Technology Modules

+ Single Window Aperture + Anti Single Pin Entry Shutters

+ Precise Alignment + Secure Socket Engagement

+ RoHS Compliant + Anti-Pull Snap

+ Silky-Satin Matte Finish + Easy to Install



## Switches

## Antibacterial

The Blenze plus switches are completely flush with the front plate in 'off' condition making them appear flat on the wall. They have a shroudless rocker with positive action. The range is future proofed 10AX and is IP 20 rated, making it truly a next generation switch range. The switches are designed with RH base for easy installation. Blenze plus range of switches are engineered with ant ingress design which give complete protection from ant entry. The 32A DP switch is definitely the 'best in class'. It can carry heavy resistive and inductive loads up to 7.68 kW. Also, in the switch, the lenses are textured for better visibility of indicators. All this and more reaffirm Honeywell's leadership in switch technology.



**DW501WHI**  
6 AX One Way Switch



**DW502WHI**  
6 AX Two Way Switch



**DW403WHI**  
10 AX One Way Switch  
with Indicator



**DW405WHI**  
10 AX Bell Push Switch



**DW504WHI**  
2M Bell Push Switch



**DW413WHI**  
16 AX One Way Switch  
with Indicator

Elec. Spec. : Rated Voltage - 230V, Rated Current - 6AX, 10AX & 16AX, Nature of Supply - AC only, Terminal Capacity - 4 Sq.mm

Features : ♦ Flushes with the front plate in OFF condition ♦ Future proofed - 10 AX ♦ Two way switch with pad printing for visual differentiation ♦ Ant - Ingress Rocker ♦ Captive and backed out screws for faster installation ♦ LED based indicator for longevity ♦ Textured lens for better visibility ♦ Heavy and sturdy terminals for more effective terminations ♦ Complies to IS 3854:1997 ♦ Fully RoHS compliant product

Finish : Silky Satin Matte

Dimension : H - 45 mm, W - 25 mm - 1M, H - 45 mm, W - 50 mm - 2M

Colours : Satin White / Charcoal Black

## 32A DOUBLE POLE

## Antibacterial



**DW224WHI**  
32A DP Switch

Module : 2M

Elec. Spec. : Rated Voltage - 230V, Rated Current - 32A, Nature of Supply - AC only, Terminal Capacity - 2.5 Sq.mm

Features : ♦ The best in its class ♦ Capable of carrying heavy Resistive and Inductive Loads with a maximum load of 7.86kW ♦ Isolates phase & neutral whenever the load is cut-off from the mains ♦ Complies to IS 3854:1997 ♦ Fully RoHS compliant product

Dimension : H - 45 mm, W - 50 mm

Colours : Satin White / Charcoal Black

Finish : Silky Satin Matte

## MINITRIP



**DW227WHI**  
25A Minitrip Switch

Module : 1M

Elec. Spec. : Rated Voltage - 240V, Rated Current - 16A / 25A, C type, No. of poles - Single Pole, Min. Voltage - 50V, Rated short circuit capacity - 1cn = 3KA

Function : Suitable for switching on 16A & 25A rated appliances

Colours : Satin White / Charcoal Black

Finish : Silky Satin Matte

Application : For domestic, agricultural and industrial applications

## MOTOR STARTER



**DW217WHI**  
25A AC Motor Starter

Module : 2M

Elec. Spec. : Rated Voltage 230 V; Rated Current - 16-25A, Nature of Supply - 50 Hz AC Only, Terminal Capacities 6 Sq.mm

Features : ♦ Technical and constructional features confirming to IS 13947-4 ♦ Thermal trip overload protection

Dimension : H-45mm, W-50mm, D-44.10mm

Colours : Satin White / Charcoal Black

Finish : Silky Satin Matte

Sockets

Antibacterial

Blenze plus sockets are engineered to ensure easy and absolute engagement to plug top. They have an enhanced safety feature of a smart anti single pin entry shutter. All sockets are rated to minimum 10A for future-proofing. The shutter design ensures that the Earth pin of the plug is engaged first before Line and Neutral pins in case of 3pin plug. All contact points are made of Phosphor Bronze material that is corrosion resistant ensuring long term reliability and avoids loss of electrical energy. All sockets are available in 2 modules.



**DW420WHI**  
10A 2/3 Pin Universal Socket

Module : 2M  
 Elec.Spec. : Rated Voltage - 250V, Rated Current - 10A, Nature of Supply - AC only, Terminal Capacity - 1.5 Sq.mm  
 Features : ♦ 10A 2/3 pin shutter socket is India's first fully compatible socket for both 4mm and 5mm dia pins ♦ 3 pin socket can take mobile charger too w Safety shutters ♦ Contact terminals - Phosphor Bronze ♦ Designed to the requirements of IS 1293:2005 ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 50 mm  
 Colours : Satin White / Charcoal Black



**DW426WHI**  
6/10/13A International Socket

Module : 2M  
 Elec.Spec. : Rated Voltage - 250V, Rated Current - 6/10/13A, Nature of Supply - AC only, Terminal Capacity - 2.5 Sq.mm  
 Features : ♦ Patented drop down safety shutters in international socket makes it probably the safest in its class which refuses single pin access to line and neutral contacts ♦ Truly international; compatible to plug tops of over 17 countries ♦ Inbuilt safety shutters ♦ Contact terminals -Phosphor Bronze ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 50 mm  
 Colours : Satin White / Charcoal Black



**DW428WHI**  
10/25A Socket

Module : 2M  
 Elec. Spec. : Rated Voltage - 230V, Rated Current - 10/25A, Nature of Supply - AC only, Terminal capacity - 4 Sq.mm  
 Features : ♦ Ensures a perfect fit with any 3 pin plug tops ♦ Inbuilt safety shutters ♦ Contact terminals - Brass ♦ Designed to the requirements of IS 1293:2005 ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 50 mm  
 Colours : Satin White / Charcoal Black



**DW427BLK**  
One Module 2 Pin Charger Socket

Module : 1M  
 Elec. Spec. : Rated Voltage - 250V, Rated Current - 16A, Nature of Supply - AC only, Terminal capacity - 2.5 Sq.mm  
 Features : ♦ Suitable for flat pin plug and 4/5 mm dia 2 pin plug tops ♦ Optimum space utilisation ♦ Inbuilt safety shutters w Contact terminals - Phosphor Bronze w Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 25 mm  
 Colours : Satin White / Charcoal Black

## Features

- ♦ Two plate system
- ♦ Grids with muscular design
- ♦ Reinforced cross sectional stress design aligns with scientifically placed ribs
- ♦ Precision engineered locks in front plates ensure proper alignment
- ♦ Higher module grids are metal reinforced to prevent buckling
- ♦ 15° leverage angle for easy removal
- ♦ Front plate with a break-off pad for screw retention
- ♦ Even on an uneven wall surface, where the grid is put on extreme stress conditions, the front plates with APS (Anti-Pull Snap feature) stay engaged
- ♦ Single window aperture eliminates dust accumulation on front plates
- ♦ Break-off pads to hold the screws
- ♦ Modules of 1,2,3,4,6,8, 8 Square, 9, 12 and 18 are available in Black & White colours

## FRONT PLATE SELECTION CHART

MODULE		1M	2M	3M	4M	6M	8M	8M Square	9M	12M	18M
Dimensions (mm)	WXH	97 x 88	107 x 88	132 x 88	157 x 88	222 x 88	257 x 88	157 x 153	281 x 88	222 x 153	219 x 215
	Fixing Centre	62	62	88	120	196	213	H-120,V-60	H-158,V-67	H-196,V-65	H-194,V-136
White		DW101WHI	DW102WHI	DW103WHI	DW104WHI	DW106WHI	DW108WHI	DW108VWHI	DW109WHI	DW112WHI	DW118WHI
Charcoal Black		DW101BLK	DW102BLK	DW103BLK	DW104BLK	DW106BLK	DW108BLK	DW108VBLK	DW109BLK	DW112BLK	DW118BLK
Antibac White		DW101WHIAB	DW102WHIAB	DW103WHIAB	DW104WHIAB	DW106WHIAB	DW108WHIAB	DW108VHIAB	DW109WHIAB	DW112WHIAB	DW118WHIAB
Antibac Black		DW101BLKAB	DW102BLKAB	DW103BLKAB	DW104BLKAB	DW106BLKAB	DW108BLKAB	DW108VBLKAB	DW109BLKAB	DW112BLKAB	DW118BLKAB

## Dimmers and Regulators

Blenze plus dimmers have a push on/off knob, for convenience of switching at any dimming-level and a full 400W power handling capability. Blenze plus regulators have standard five definite speeds and 'off'. The regulator has a unique knob with a unique TM SPEED-VIEW. Also, it is completely hum-free, irrespective of the speed. Blenze plus volume control comes in 2M size.

### REGULATOR



**DW472WHI**  
Step Fan Speed Control 120W

Module : 2M  
 Elec. Spec. : Rated - 100 Ohms 3W LIN w/w, Amplifier audio input (max) - 17V - RMS (35W RMS in 8 Ohms), Terminal capacities - flexible leads with connectors  
 Features : ♦ Five definite speeds + OFF ♦ Unique knob with SPEED - VIEW™ ♦ Completely hum-free irrespective of speed ♦ Uniform speed increments across steps ♦ Ease of installation with pre-marked screw-connector ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 50 mm  
 Colours : Satin White / Charcoal Black

### DIMMER



**DW480WHI**  
Push ON/OFF 400 W Dimmer

Module : 2M  
 Elec. Spec. : Rated Voltage - 230V, Rated Power - 400W, Nature of Supply - AC only, Type of load - Incandescent lamp only, Terminal capacity - 2.5 Sq.mm on pre marked screw-connector  
 Features : ♦ Push ON/OFF knob ♦ Convenience of switching at any dimming-level ♦ Ease of installation with pre-marked screw-connector ♦ Full 400W power handling capability ♦ Linear brightness control ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 50 mm  
 Colours : Satin White / Charcoal Black

# Communication Range

Blenze plus communication range consists of TV coaxial, Computer jack, AV socket, Telephone jack and USB charger. The entire range is designed for maximum data & voice transfer efficiency. Features in the range like angled connectors in TV coaxial, tool free connectors in computer jack and sliding shutters in telephone jack are designed to deliver minimal signal loss, ease of installation and low maintenance.

## TELEPHONE JACK



**DW492WHI**  
Two Line RJ 11

Module : 1M  
 Elec. Spec. : No of contacts - 4, Category - 3, Voltage - 33V r.m.s / 70V DC, Speed of transmission - 16 MHz 100 Ohms UTP cable size, Rate of transmission - 10 Mbps, Compliance of standards - FCC Part 68, ANSI/EIA/TIA-568 TIA TSB - 36, TIA TSB-40, Attenuation - 0.4db  
 Features : ♦ 2 Lines can be connected simultaneously ♦ Anti-spread (Strands) Screw terminals for easy installation ♦ Spring loaded sliding shutter that protect from dust ♦ 50µ" Gold plated leads for better data transfer efficiency w Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 25 mm  
 Colours : Satin White / Charcoal Black

## COMPUTER JACK



**DW493WHI**  
CAT 6 RJ 45

Module : 1M  
 Elec. Spec. : No of contacts - 8, Category - Cat 6, Speed of transmission - 250 MHz 100 Ohms UTP cable size, Rate of transmission - 1 GB/sec, Compliance of standards - FCC Part 68, Insulation resistance - >500 M Ohms, Current rating - 150 VAC, 2 A, Dielectric withstand voltage - 1000V, 60 Hz/1min, Contact resistance - <20 million Ohm, DC Resistance - 0.1 Ohm  
 Features : ♦ CAT 6 compliant Rj45 ♦ Spring loaded sliding shutter that protects from dust ♦ Underwriters Laboratories (UL) approved ♦ Tool free connecting terminals ♦ 50µ" Gold plated leads for better data transfer efficiency ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 25 mm  
 Colours : Satin White / Charcoal Black

## USB Charger



**DW583WHI**  
USB Charger

Module : 1M  
 Features : ♦ Inbuilt surge protection ♦ Short circuit protection available in output ♦ Snapfit modular design  
 Application : Charging devices with a USB connection like smart phones, touch screen tablets, games consoles, MP3 players, E-book readers, Cameras, Navigation devices, etc.  
 Specification Details  
 Input Voltage : 90V to 270V  
 Frequency : 50Hz  
 Input Power : 300mW [With No Load]  
 Output Voltage : 4.75V [Without Load] to 5.16V [Full Load]  
 Output Current : 0 - 1 Amp  
 Output Power : 0 - 5 Watt  
 Output Over Current Protection : 1 - 1.2 Amp  
 Output Rise Time with Load : 76mS @210V

## TV SOCKET



**DW451BLK**  
TV Socket

Module : 1M  
 Features : ♦ Angled connector holding ♦ Silver plated for minimal signal loss ♦ Screw terminals for easy installation ♦ Fully RoHS compliant product  
 Dimension : H - 45 mm, W - 25 mm  
 Colours : Satin White / Charcoal Black

## Technology Modules

Blenze plus Technology range comes with smart products like timer switch, foot lamp and remote switch. This brilliant range comes with futuristic features delivering ease of use, user convenience, safety and customised solutions. Blenze plus brings in the best of technology in these products to offer a truly safe experience.

### TIMER SWITCH



**DW219BLK**  
Timer Switch

- Module : 3M
- Elec.Spec. : Rated Current: 6A Resistive, 1A Inductive, Rated Voltage: 170 - 250V, 60hz, Nature of Supply - AC only, Battery - 1.5V DC NiMH with 100hrs backup
- Features : ♦ Automatic ON/OFF control based on preset timings ♦ 24hrsx7 days programmable timer ♦ Repeatable 8 programmable channels ♦ Adjustable ON/OFF delay control from minute to day ♦ 15 user friendly DAY settings ♦ Single push TRI-STATE operation (ON-OFF-AUTO) ♦ LCD indicator of ON/OFF delay for switching ♦ Retains status during power loss ♦ Recessed RESET to avoid accidental usage ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 75 mm
- Colours : Satin White / Charcoal Black

### DOWN LIGHT / FOOT LAMP



**DW530WHI**  
Down Light

- Module : 2M
- Elec.Spec. : Rated Voltage - 230V, Nature of Supply - AC only, Terminal capacities - 2.5 Sq.mm
- Features : ♦ Long life white colour LED based illumination ♦ Maintenance free LED lamps, which never need to be changed ♦ Power consumption less than 1W ♦ Textured lens for uniform dispersion of light ♦ Operates even at low voltages ♦ Easy installation with screw terminations ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 50 mm
- Colours : Satin White / Charcoal Black

### REMOTE SWITCH



**DW606WHI**  
Remote Switch

- Module : 4M (Mono block)
- Elec.Spec. : Rated Current : Switch - 5A Resistive/ 2.5A Inductive per switch, Fan - 100W(max) Rated Voltage: 140- 320V, Number of Channels: 4 Nature of Supply - AC only, Remote control: Infrared (line of sight), Remote range: 30 feet @ operating angle 120° Remote Battery: CR2025, Operating temperature: 0-55°C
- Features : ♦ Operates from wall-unit and with a full-functional remote handset ♦ Built-in memory retains last status of load in case of power failure or when switched ON ♦ Sensitive infrared remote control operates from 30 feet distance ♦ Press S1/S2/S3 to turn individual loads ON/OFF, corresponding keys will glow when they are ON ♦ Press '⊕' to ON/OFF the fan, use '▲, ▼' to increase and decrease the fan speed ♦ Pressing S1/S2/S3 for more than 2 sec will turn OFF the entire system (wall unit) ♦ Avoid using more than one remote in same room, if unavoidable, keep a distance of 10 feet and in the same line of the remote handset ♦ Fully RoHS compliant product
- Colours : Satin White

### ASSEMBLED IT MODULE



**DW109WHI-A**



**DW109WHI-B**

- Module : 9M
- Features : ♦ Front Plate with Satin finish blends with all kinds of interiors echoing latest trends ♦ Screw retention pads ♦ Angular clearance built into design to facilitate easy removal of Snap On ♦ Snap On facilitates protection against paint spills and other installation related abuses ♦ Multi-directional flexible alignment in the grid covers for shortcomings in box installations ♦ Structurally stable fixing screw feature in the grid ♦ Resistant to ageing and to humidity ♦ Resistant to heat
- Dimension : L x B x D : 281.70 mm x 88 mm x 31.2 mm
- DW 109 WHI - A : 9M front plate assembled with 4 nos. of 10 Amps socket and 1 no. of 16 Amps indicator switch of the Blenze plus range of products
- DW 109 WHI - B : 9M front plate assembled with 4 nos. of international socket and 1 no. of 16 Amps indicator switch of the Blenze plus range of products
- Application : Houses, Hotels, Offices, Hospitals and similar installations





Blenze plus introduces the new electro mechanical hospitality range specially designed for the hotel industry. The range includes energy key tag, DND, MMR, MML with superior aesthetics, indicators and energy saving features which ensure the guest's comfort is not compromised in any way. The range is convenient, safe and efficient.

### ENERGY KEY TAG



**DW527WHI/BLK**  
20A Energy Key Switch with  
Time Delay

Module : 3M

Features : ♦ Modular, 3 module in size, made of engineering plastics ♦ Easy installation/removal of module due to the snap fit feature ♦ Flat profile similar to existing range ♦ Operating voltage - 170 to 250 volts AC ♦ Load Capacity - 3000W, all types of inductive & resistive loads ♦ Space provided in the key tag for sticking room no ♦ Downward arrow LED in the front plate indicates the insertion of the key tag or power ♦ The time delay will keep the power in the room for 30 secs (±5 sec) even after removal of the key tag.

Application : To control supply to room(s) and office areas where energy wastage has to be prevented

To prevent the discomfort of the guest being in the darkness after pulling off the key tag

To serve as master control for Electrical appliances of all resistive & inductive loads upto 3000W.

Dimension : LxB: 74.5X 59.5 mm Depth: 64mm

### DND SWITCH



**DW414WHI/BLK**  
2 way Switch DND marked 1M

Module : 1M

Features : ♦ Modular (1M) ♦ Laser marking on the switch rocker ♦ LED lamp for use as locator or indicator ♦ LED ensures less consumption of electricity and long life ♦ Rocker shape for more ergonomics, human touch and feel ♦ Easy installation/ removal of module due to the snap fit feature ♦ LED for long life

Application : Service indication in hotel industry

Dimension : LxB: 45x24.7 mm Depth: 26 mm

# Hospitality Range

## MAKE MY ROOM / MAKE MY LAUNDRY SWITCH



DW416WHI/BLK/  
DW415WHI/BLK  
1M MML/MMR Switch

Module : 1M  
 Features : ♦ Modular (1M) ♦ Laser marking on the switch rocker ♦ LED lamp for use as locator or indicator ♦ LED ensures less consumption of electricity and long life ♦ Rocker shape for more ergonomics, human touch and feel ♦ Easy installation/ removal of module due to the snap fit feature ♦ LED for long life  
 Application : Service indication in hotel industry  
 Dimension : LxB:44.9x24.7 mm Depth:26mm

## SERVICE INDICATORS



D901WHI/BLK/  
DW902WHI/BLK/  
DW903WHI/BLK  
1M DND, MMR, MML Indicator

Module : 1M  
 Elec. Spec. : Rated - 100 Ohms 3W LIN w/w, Amplifier audio input (max) - 17V - RMS (35W RMS in 8 Ohms) | Terminal capacities - flexible leads with connectors  
 Features : ♦ Modular (1M) ♦ Comes in compact single module size ♦ Good visibility of the service ♦ LED for long life  
 Application : Service indication in hotel industry  
 Dimension : LxB:44.9x24.7 mm Depth:24.4mm

# Metal Box

## METAL BOX SELECTION CHART

MODULE		1M	3M	4M	6M	8M	8M Square	9M	12M	18M
Metal Box Dimensions (mm)	WXHxD	73 x 70 x 50	98 x 72 x 51	132 x 70 x 51	208 x 70 x 61	228 x 76 x 61	133 x 133 x 50	245 x 77 x 60	208 x 139 x 61	210 x 211 x 60
	Fixing Centre	60	88	121	197	H-158, V-67	H-120, V-60	H-158, V-67	H-196, V-65	198
Metal Box Code		GDW26012	GDW26003	GDW26045	GDW26068	GDW260810H	GDW260810V	GDW26009	GDW261216	GDW261824
White		DW101WHI DW102WHI	DW103WHI	DW104WHI	DW106WHI	DW108WHI	DW108VWHI	DW109WHI	DW112WHI	DW118WHI
Charcoal Black		DW101BLK DW102BLK	DW103BLK	DW104BLK	DW106BLK	DW108BLK	DW108VBLK	DW109BLK	DW112BLK	DW118BLK
Antibac White		DW101WHIAB DW102WHIAB	DW103WHIAB	DW104WHIAB	DW106WHIAB	DW108WHIAB	DW108VWHIAB	DW109WHIAB	DW112WHIAB	DW118WHIAB
Antibac Black		DW101BLKAB DW102BLKAB	DW103BLKAB	DW104BLKAB	DW106BLKAB	DW108BLKAB	DW108VBLKAB	DW109BLKAB	DW112BLKAB	DW118BLKAB



# GHAR MEIN HONEYWELL, TOH LIFE VERY WELL!

## **BANGALORE**

3<sup>rd</sup> Floor, Chambers @ Mantri  
Municipal No. 10  
Richmond Road  
Bangalore - 560 025  
Tel: +91-80-67124120/21/22/23  
E-mail: eccbangalore@honeywell.com

## **BARODA**

2<sup>nd</sup> Floor, Startrek  
Opp. Rajlakshmi Complex  
Old Padra Road,  
Baroda - 390 005  
Tel: +91-265-6699600  
Fax: +91-265-6699610  
E-mail: eccbaroda@honeywell.com

## **Honeywell International India Pvt. Ltd.**

Unitech Trade Center  
5<sup>th</sup> Floor, Sector 43, Block C  
Sushant Lok, Phase 1  
Gurgaon - 122 022  
Tel: +91-124-4975050  
Fax: +91-124-6715014  
E-mail: eccdelhi@honeywell.com

## **Honeywell Electrical Devices & Systems India Limited**

Chennai: 3<sup>rd</sup> & 4<sup>th</sup> Floor  
57, 59, 61 & 63 Dowlath Towers, Taylors Road  
Kilpauk, Chennai - 600 010, India  
Tel: +91-44-66085600  
Email: eccteamindia@honeywell.com  
Email: eccchennai@honeywell.com  
www.honeywell.com

## **Honeywell Automation India Limited**

Pune: Plot No. 56/57,  
Hadapsar Industrial Estate  
Pune - 411 013, India  
Tel: +91-20-66039400  
Fax: +91-20-66039800  
Email: eccpune@honeywell.com

## **Honeywell Electrical Devices & Systems**

Customer Care: 1800 103 3848  
WhatsApp: +91 81306 91299  
www.honeywell.com

## **HYDERABAD**

8-2-418, Krishnama House  
3<sup>rd</sup> Floor, Road No. 7  
Banjara Hills  
Hyderabad - 500 034  
Tel: +91-40-66030900/70  
Fax: +91-40-66030971  
E-mail: ecchyderabad@honeywell.com

## **KOLKATA**

Srijan Techpark  
8<sup>th</sup> Floor, DN-52  
Salt Lake, Sector-V  
Kolkata - 700 091  
Tel: +91-33-66283693/94  
Fax: +91-33-66283701  
E-mail: ecckolkata@honeywell.com

## **MUMBAI**

Eco-elite Building,  
2<sup>nd</sup> Floor, Marol Marishi Road, Marol  
Next to Zakaria Industrial Estate  
Andheri (E), Mumbai - 400 059  
Tel: +91-22-67650680/81  
Fax: +91-22-67650682  
E-mail: eccmumbai@honeywell.com

**Honeywell**

