



GHAR MEIN HONEYWELL, TOH LIFE VERY WELL!

BANGALORE

3rd Floor, Chambers @ Mantri
Municipal No. 10
Richmond Road
Bangalore - 560 025
Tel: +91-80-67124120/21/22/23
E-mail: eccbangalore@honeywell.com

BARODA

2nd Floor, Startrek
Opp. Rajlakshmi Complex
Old Padra Road,
Baroda - 390 005
Tel: +91-265-6699600
Fax: +91-265-6699610
E-mail: eccbaroda@honeywell.com

Honeywell International India Pvt. Ltd.

Unitech Trade Center
5th Floor, Sector 43, Block C
Sushant Lok, Phase 1
Gurgaon - 122 022
Tel: +91-124-4975050
Fax: +91-124-6715014
E-mail: eccdelhi@honeywell.com

Honeywell Electrical Devices & Systems India Limited

Chennai: 3rd & 4th Floor
57, 59, 61 & 63 Dowlath Towers, Taylors Road
Kilpauk, Chennai - 600 010, India
Tel: +91-44-66085600
Email: eccteamindia@honeywell.com
Email: eccchennai@honeywell.com
www.honeywell.com

Honeywell Automation India Limited

Pune: Plot No. 56/57,
Hadapsar Industrial Estate
Pune - 411 013, India
Tel: +91-20-66039400
Fax: +91-20-66039800
Email: eccpune@honeywell.com

Honeywell Electrical Devices & Systems

Customer Care: 1800 103 3848
WhatsApp: +91 81306 91299
www.honeywell.com

HYDERABAD

8-2-418, Krishnama House
3rd Floor, Road No. 7
Banjara Hills
Hyderabad - 500 034
Tel: +91-40-66030900/70
Fax: +91-40-66030971
E-mail: ecchyderabad@honeywell.com

KOLKATA

Srijan Techpark
8th Floor, DN-52
Salt Lake, Sector-V
Kolkata - 700 091
Tel: +91-33-66283693/94
Fax: +91-33-66283701
E-mail: ecckolkata@honeywell.com

MUMBAI

Eco-elite Building,
2nd Floor
Marol Marishi Road, Marol
Next to Zakaria Industrial Estate
Andheri (E), Mumbai - 400 059
Tel: +91-22-67650680/81
Fax: +91-22-67650682
E-mail: eccmumbai@honeywell.com

Honeywell




MIDAS

Add beauty to your walls



MIDAS combines smart and modern styling with an efficient design to ensure brilliant aesthetics and maximum safety. The range includes switches, sockets, dimmers, regulators and communication jacks. The products are tested for BIS standards, signifying the quality and reliability of the range. With its stylish screw-less finish, and sleek designed front plates, MIDAS adds beauty to your walls.

FEATURES

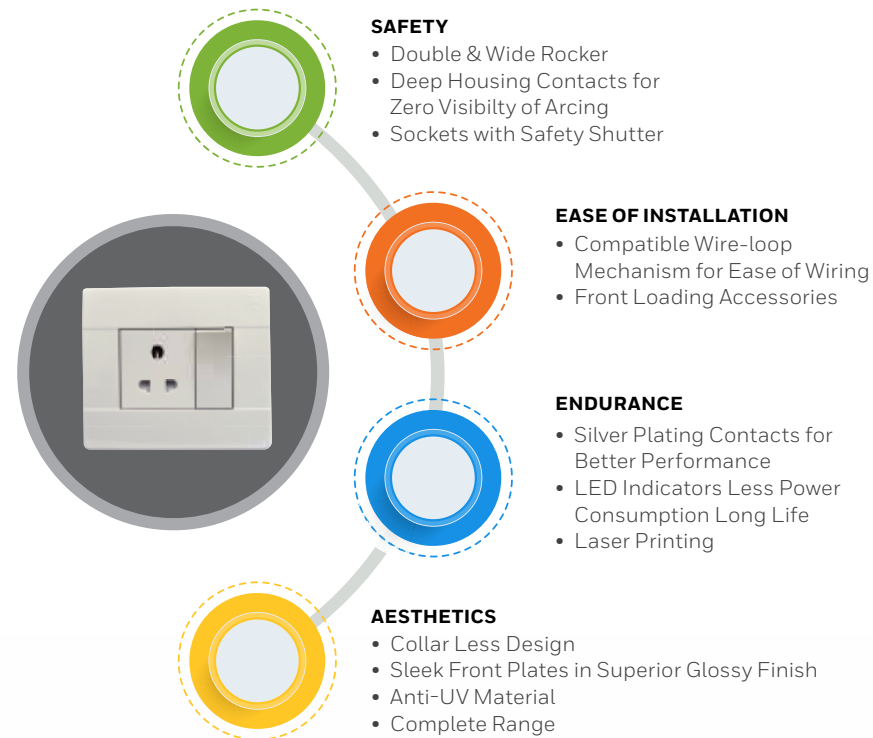

SWITCHES

- As per IS 3854 : 97
- Double & Wide Rocker Design
- Shrouded Terminals for Safety of Users
- Compatible Wire Loop Mechanism for Ease of Installation
- Deep Housing Contacts for Zero Visibility of Arcing
- Switches with LED Indicators
- Silver Plating Contacts for Better Performance
- ROHS Compliant

Technical Specification

Rated Voltage: 230V
Rated Current: 6A and 16A
Frequency : 50Hz AC
Module: 1
Terminal Capacity: 6A-1.5 Sq mm, 16A-4 Sq mm



6A One Way with Indicator



16A One Way Switch

SOCKETS

- Less Contact Resistance, Improves Connectivity
- Line , Neutral & Earth Marking on Terminals
- Safety Shutters
- Single Ejector Point for Easy Removal
- ROHS Compliant

Technical Specification

Rated Voltage: 230V
Rated Current: Available in 6A / 16A & 25A
Frequency : 50Hz AC
Module: 2
Terminal Capacity: 6A - 1.5 sqmm / 16A - 4 sqmm / 25A - 2.5 sqmm



6A Socket



6/16A Socket



6/25A Socket

INTERNATIONAL SOCKET

- Less Contact Resistance, Improves Connectivity
- Line , Neutral & Earth Marking on Terminals
- Patented Drop Down Safety Shutters
- Single Ejector Point for Easy Removal
- Anti-Single PinEntry to Line & Neutral Contacts
- Compatible to Plug Tops of 17+ Countries
- ROHS Compliant

Technical Specification

Rated Voltage: 230V
Rated Current: Available in 6A upto 13A
Frequency : 50Hz AC
Module: 2
Terminal Capacity: 2.5 sqmm



6A-13A Socket

FAN SPEED REGULATOR

- 100W , 4 Speed + Off Step Type in 1 Module
- 120W , 5 Speed + Off Step Type in 2 Module
- Smart & Linear Speed Distribution Over Each Step
- Zero Resistance to Humming Noise
- 360 Degree Rotary Knob
- Rigid Legs for Site Suitability
- ROHS Compliant

Technical Specification

Rated Voltage: 230V
Rated Current: 100Watt / 120Watt
Frequency : 50Hz AC
Module: 1/2
Terminal Capacity: 95mm Flexible Lead Connector



100W 4 Step Fan Controller



120W 5 Step Fan Controller



MINI TRIP MCB

- As per IS 60898-1
- Modular MCB for Use with Wiring Devices
- ROHS Compliant

Technical Specification

Rated Voltage: 240V
Minimum Operating Voltage: 50V
Rated Current: 25A in C Curve Single Pole
Breaking Capacity : 3kA
Electrical Endurance: 4000 Cycles

USB CHARGER

- Charge Smart Devices Directly from the Switich Board
- 1A 1 Module USB Charger
- ROHS Compliant

Technical Specification

Rated Voltage: 230V
Minimum Operating Voltage: 90V
Input Power: 300mW (Without Load)
Output Voltage: 4.75V to 5.16V
Output Current : Max 1A
Output Over Current Protection: upto 1.2A



USB Charger

COMMUNICATION ACCESSORIES

RJ45

- Cat6 Category with 8 No. of Contacts
- 250MHz Speed with upto 1GBPS Transmission Rate
- Spring Loaded Shutters

RJ11

- Category 3 with 2 No. of Contacts
- 16MHz Speed with upto 10mBPS Transmission Rate

TV Socket

- For Enhanced Reception of TV Signal



RJ45 CAT6



RJ11 Outlet



TV Socket

FRONT PLATES

- Sleek & Smart Plates to Match Your Interior
- Collar Less Design
- Superior Gloss Finish
- Minimal Dust Accumalation
- Smart Design to Facilitate Front Laoding & Removal
- Multi-pin Snap ON Locking Arrangement
- Single Ejector Point for Easy Removal
- 2Module Size Separators in Grid Plate
- Available in 1 / 2 / 3 / 4 / 6 / 8H / 8V / 12 / 18 Modules



8 Module Front Plate